


Pulse Hydraulics Ltd

Unit 10 George Holmes Business Centre
George Holmes Way
Swadlincote
Derbyshire
DE11 9DF

Tel: 07969 885 796 / 07891 687 403

paul@pulsehydraulics.co.uk

john@pulsehydraulics.co.uk

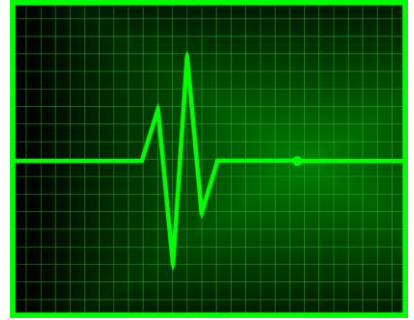

PULSE HYDRAULICS - The Service Plug

USE

The Service Plug has been designed to plug hoses or rigid pipes, to avoid oils and chemicals from contaminating the environment, and to preserve costly oils and liquids inside systems during maintenance and repair.

It can also be used to protect machine channels from dust and corrosion, and when cleaning or painting to prevent water, paint, dust and pollution from harming the system and its components.

IMPORTANT

For use in non pressurized systems and vacuum systems only!

MATERIAL

The Service plug is manufactured from high quality oil resistant rubber.

DIMENSIONS

Will fit channels and holes between 4-23 mm and 12-43 mm.

TEMPERATURE

-25°C - +90°C / -15°F - +195°F.

TOOLS

No tools needed! Use your hand. Insert, push then push and twist in the same action.

CUTTING

If the plug reaches the bottom it can be cut. If you choose to cut a plug, make sure you leave enough material outside the hole so that you can easily remove the plug.

